
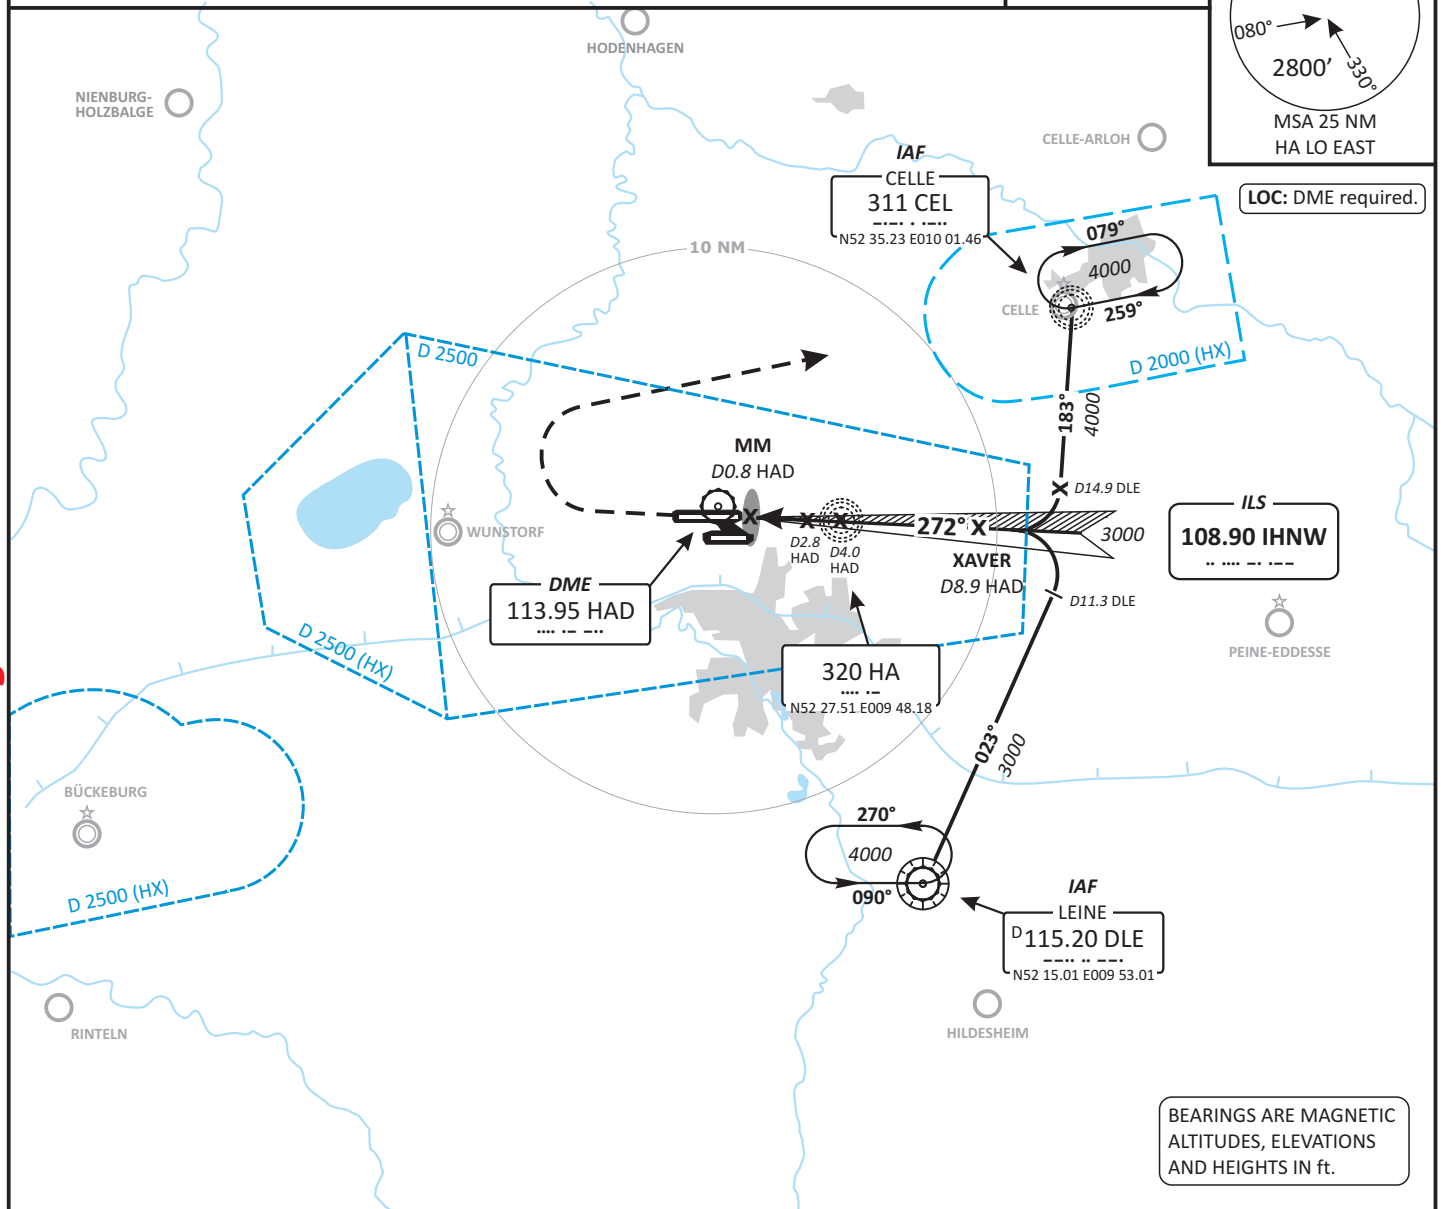



ATIS 132.120

BREMEN RADAR 131.320
DIRECTOR 119.600TOWER 120.170
GROUND 121.950Apt. Elev
183'

LOC: DME required.

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN ft.

MISSED APPROACH PROCEDURE
RT to CEL NDB as soon as practicable
climbing to 4000.

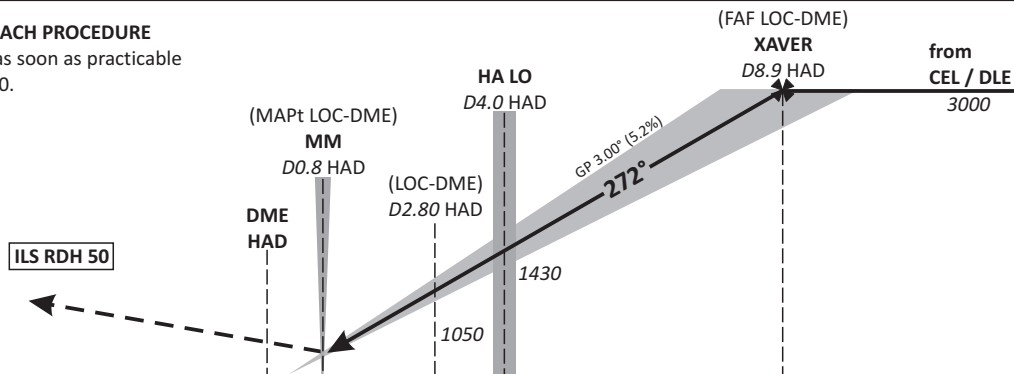

OCA (OCH)	A	B	C	D	D _L
ILS CAT I	328 (145)	338 (155)	369 (186)	379 (196)	
ILS CAT II	240 (57)	256 (73)	269 (86)	282 (99)	303 (120)
LOC-DME	615 (430)	615 (430)	615 (430)	615 (430)	

CAT IIIA AND CAT IIIB (MNM RVR 75M) APPROVED.

DME HAD	2	3	4	5	6	7	8	
DIST THR	1.8	2.8	3.8	4.8	5.8	6.8	7.8	
ALTITUDE	800	1120	1430	1750	2070	2390	2710	

LOC-DME: Timing not authorized for defining the MAPt.

GS	KT	80	100	120	140	160	180
4.0 DME HAD - THR (3.8 NM)	MIN:SEC	2:51	2:17	1:54	1:38	1:26	1:16
Rate of descent (5.2%)	FT / MIN	420	530	640	740	850	960